


Addendum: RV-8 70CC Rudder Control Horn Update

We noted that the description of the control horn markings and the description in the manual is not consistent. Please note the following for clarity regarding the rudder control horns installation:

Option 1: Pull/Pull Installation (4 Control Horns marked “PULL”):

- Install these control horns when the rudder servo is mounted in the fuselage:

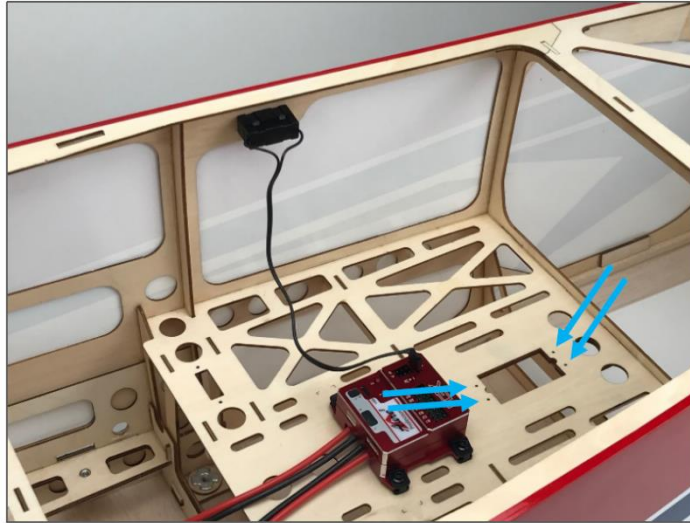

-
- Use the four control horns marked “Pull”. Two control horns for the left side and two for the right side. Use a backplate for each set of control horns.
- These control horns should be installed 40mm from the bottom edge of the rudder, as depicted in the image provided:



○

Option 2: Push/Pull Installation with Rudder Servo Mounted in the Fin (2 Control Horns marked “RUD”):

- For aircraft configuration with the servo mounted in the vertical fin, use the two control horns marked “Rud”.
- These control horns should be installed on the right side of the rudder in the higher location, approximately 210mm from the bottom edge of the rudder, as shown in the provided images:



○



○



Option 3: Push/Pull Installation with Rudder Servo Mounted on side of the fuselage (2 Control Horns marked “RUD”):

- For aircraft configuration with the servo mounted in right or the left side of the fuselage (depending on personal preference), use the two control horns marked “Rud” as shown in the provided images:



Please ensure that you follow these updated instructions for the proper installation of your rudder control horns. If you have any questions or require assistance, please reach out to our support team by emailing support@flexinnovations.com or call

ing 866-310-3539.